


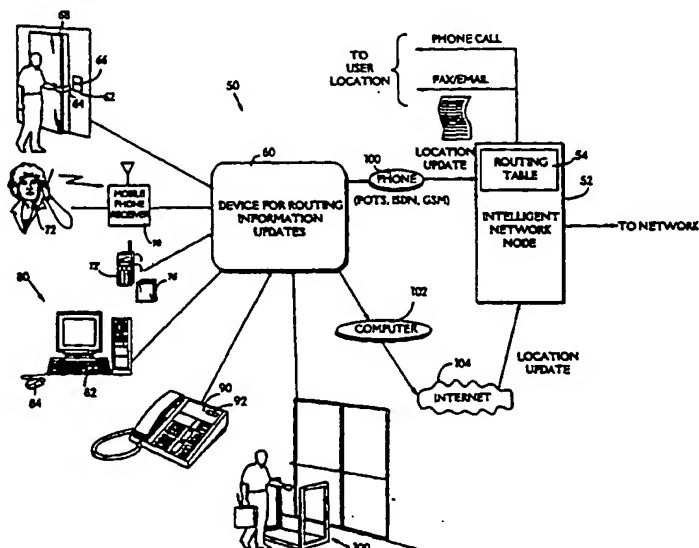

## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> : <b>H04Q 7/38, H04M 3/42</b>	<b>A1</b>	(11) International Publication Number: <b>WO 98/21911</b> (43) International Publication Date: <b>22 May 1998 (22.05.98)</b>
<p>(21) International Application Number: <b>PCT/SE97/01896</b></p> <p>(22) International Filing Date: <b>11 November 1997 (11.11.97)</b></p> <p>(30) Priority Data: <b>08/747,594</b> <b>12 November 1996 (12.11.96)</b> <b>US</b></p> <p>(71) Applicant: <b>TELEFONAKTIEBOLAGET LM ERICSSON</b> (publ) [SE/SE]; S-126 25 Stockholm (SE).</p> <p>(72) Inventor: <b>TRÄNK, Jörgen</b>; Hallonstigen 3, S-651 15 Kil (SE).</p> <p>(74) Agent: <b>TELEFONAKTIEBOLAGET LM ERICSSON</b>; Patent and Trademark Dept., S-126 25 Stockholm (SE).</p>	<p>(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZW, ARIPO patent (GH, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).</p> <p><b>Published</b> <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i></p>	

(54) Title: **DEVICE FOR ROUTING INFORMATION UPDATES**

## (57) Abstract

A telecommunications network automatically registers and de-registers terminal equipment based on sensed user location. A Universal Personal Telecommunications (UPT) user does not need to remember or take the time to manually register upon arriving at a location or de-register before leaving a location. Instead, automatic sensing devices sense when the UPT user arrives and/or leaves a location. A device for routing information updates automatically generates and sends UPT registration and de-registration messages to an Intelligent Network node in response to sensed user location. The Intelligent Network node updates its routing tables in response to the messages, and automatically routes user calls to the appropriate terminal locations based on the routing tables.

*FOR THE PURPOSES OF INFORMATION ONLY*

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LJ	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

## DEVICE FOR ROUTING INFORMATION UPDATES

## Field of the Invention

This invention relates to telecommunications networks such as Intelligent Networks. Still more particularly, this invention relates to Universal Personal Telecommunications, and to systems and methods for automatically updating a telecommunications network concerning the location of a Universal Personal Telecommunications user.

## Background and Summary of the Invention

People have more convenient access to telecommunications devices than ever before. Almost everyone has a telephone at home, and most of us also have a telephone at work. Some people also carry portable cellular telephones with them wherever they go. We can see people talking on digital pocket phones in the car, in restaurants, in shopping malls and at the beach.

This multiplicity of communications devices theoretically allows a person to be contacted wherever he or she happens to be. However, the process of successfully reaching a particular person has become complicated. Nowadays, when you ask for someone's telephone number, it is common to get back a list of phone numbers: the work number, the home number, the cellular phone number, the work facsimile number, the home facsimile number, an electronic mail address, etc. All of these telephone numbers are difficult to remember. One must also guess which numbers to try first. It can take a long time to dial the numbers in the list until you finally try the right one. Failed attempts can be expensive if the caller is calling long distance and an answering machine, fax machine or voice mail answers the telephone in the person's absence.

"Universal Personal Telecommunication" ("UPT") addresses this problem. The objective of personal telecommunications is to provide a means of communicating with anyone, anytime, anywhere -- whether at work, at home or on the move. Under the UPT concept, the telecommunications network takes care of routing your call to the correct telephone or other terminal device. You request the

network to connect you to the person you want to reach -- not to a place or a particular terminal. You need not know where this person is for the moment -- the network will find out.

In UPT, the fixed association between terminal access and user identification is removed. The network treats identification of UPT users separately from the addressing of terminals and network access points. Any UPT user can make and receive calls on any terminal. The so-called "Intelligent Network" ("IN") architecture can be used to efficiently implement Universal Personal Telecommunications. See, for example, Söderberg, L., "Evolving an Intelligent Architecture for Personal Telecommunication", 4 Ericsson Review 156-170 (1993); Sundborg, J., "Universal Personal Telecommunication (UPT) -- Concept and Standardisation", 4 Ericsson Review 140-155 (1993); and Wallinder, S., "Implementation of UPT--Universal Personal Telecommunications", 1 Ericsson Review (1994).

Because UPT user identification is independent of telephone or other terminal addressing, the telecommunications network must have some way of locating users so it can associate them with nearby telephones or other terminals. UPT requires the network to be constantly updated about UPT users' locations, to enable routing of phone calls and email/fax to the right network address (extension/location). This locating process is sometimes called personal mobility call registration.

In the past, personal mobility registration has been carried out manually, i.e., the user of the service has to access the service from some kind of terminal and manually tell it to associate that (or a different) terminal with the user for the time at least. For example, the UPT user can register a terminal address for incoming calls -- telling the network to route all incoming calls for that user to that terminal address. The UPT user can also register outgoing calls so all outgoing calls from a terminal will be charged to the user. The call registration is made as an update of the UPT user's current terminal address. Such updates are normally done by means of DTMF tone signaling from an ordinary telephone, or via computer terminals connected to the Intelligent Network service management system.

For example, in the standard telephone example, when the UPT user arrives at a new location he can pick up a standard telephone set and dial the UPT service. The user may be required to input his personal universal telephone number and an

associated personal identification number or other password to identify and authenticate himself to the UPT service. The UPT service may prompt the user with a voice menu. The user can make selections by depressing corresponding touch-tone buttons on the standard telephone set. One of the options may be "personal mobility."

5 Upon selecting this option, the user may be prompted concerning what kind of registration he desires (e.g., register incoming calls, register outgoing calls, or registering all calls). Upon depressing an appropriate touch-tone button to select registration type, the service may prompt the user to enter the terminal address of the terminal device he is registering and the time when registration is to expire.

10 In another prior registration example, the user may use a display device to access the UPT service. The display enables the UPT user to receive graphical information on the screen, and to respond by touching the screen, using a mouse or pressing buttons on a separate keyboard. See Sundborg (cited above), Figure 12.

An appropriate node (or nodes) in the network updates its routing table upon  
15 receiving a call registration. From then until the registration is canceled or superseded, the network will route all incoming calls for that UPT user to the registered terminal address -- and may also charge the user for all calls outgoing from that terminal address. The registration may have a certain valid time period associated with it. A new call registration from the same UPT user will cancel the  
20 one made previously. The UPT user can explicitly de-register -- breaking the association between the user and a network address.

A significant problem with prior personal mobility features described above is that the user has to remember (and take the time) to update the network routing table each time he or she changes location. If the user forgets or doesn't take the time to  
25 manually update the network, the network will be unable to direct messages to the right location and terminal. This can cause serious problems. For example, the network may erroneously direct an important personal call to the user's work phone after the user has gone home for the day.

The prior art includes various techniques for locating subscribers and routing  
30 calls to subscriber locations. For example:

U.S. Patent No. 5,506,887 teaches an Advanced Intelligent Network system providing a personal communication service to subscriber wireless handsets or other

portable devices (e.g., laptop computers). When a wireless unit comes within range of a mobile base station, the mobile base station automatically dials and informs the central network controller of the registration.

WO 95/34985 (Alcatel) discloses a subscriber ID card that can be remotely  
5 interrogated. Each terminal device which recognizes, through remote interrogation, that the subscriber is nearby reports this fact to the service operator. Calls addressed to the subscriber are directed to the service operator and from there, to whatever terminal device reported last.

WO 95 01070 (Ericsson) discloses sensing when a mobile phone has been  
10 placed into a battery charger; and sending a message from the battery charger to the telephone network. This message causes the network to route, to a fixed telephone at the same location, calls directed to the mobile phone. The battery charger similarly detects when the mobile phone has been removed from the charger, and sends a message to the network that causes the network to route, to the mobile phone, calls  
15 directed to the fixed telephone.

EP 0520194 (Network Access) discloses a radio tracking system for tracking the location of a telephone user. The user carries a personal communicator that transmits radio signals to the tracking system. The tracking system tracks the user's location, and sends information to the telephone system service node. The service  
20 node stores this information in a look-up table along with the directory telephone number of the phone at the subscriber's current location.

EP 0578374 (Northern Telecom) discloses a building access control system using badges. The system determines when subscribers leave and access a building -- and in some cases, where the subscribers are within the building. A telephone switch  
25 uses this information to redirect calls to the phone nearest the subscriber.

EP 0 433 465 (NTT) discloses a personal telephone number system. Registration is provided automatically when a portable telephone is connected by a cable to the system. See page 11, lines 11-15.

However, further improvements are possible. For example, none of these  
30 references specifically mentions how automatic subscriber locator features including a means that can sense the location of a subscriber without requiring the subscriber to

carry portable telephone equipment, can be integrated with an intelligent network architecture.

The present invention relieves the user of having to manually update the network or the UPT service with the user's location. The present invention solves the manual updating problem by providing methods and devices for automatically generating personal mobility location updates and providing them to the network. By means of a special device connected to either a telephone or to a personal computer/workstation, the telecom service is notified each time the service user is visiting the location where the device is located. The device is capable of detecting when the user is entering/leaving the location where the device is located. Because the UPT service is automatically informed of the user's location, the chance an incoming phone call, facsimile transmission and/or electronic mail message reaching the user is much higher.

When the device detects that the service user is entering the premises, a "location update" is sent to the network node where the routing table is stored. The network node updates the routing table with the terminal address of the nearest terminal (e.g., the phone/fax number and/or email address of the terminal) -- automatically registering the terminal for that user. When the device detects that the service user leaves the premises, it sends another "location update" to the network to de-register the user with respect to that terminal at that location.

Detection of service user presence at a specific location can be accomplished in any of several ways. For example, the network can detect user presence by:

- using information in electronic security locking systems (e.g., where the user must slip a card in a card reader to enter the building);
- detecting "location updates" sent from a mobile phone;
- detecting when a mobile phone is put into its battery charger;
- executing a small application on a personal computer/workstation that lets the user indicate his presence by a single keystroke or mouse "click";
- depressing a special key on a telephone set; and/or

- using an anti-theft system to detect when the user enters/leaves his room or building.

The detection device can be connected to the telecom service in any of several different ways depending upon access method, for example:

- 5       • the device send routing updates by means of DTMF signaling (POTS) over a standard telephone link, user-to-user information (ISDN) over an ISDN link, or through use of USSD (GSM) signaling over a GSM link; or
- 10       • the device can be connected to a personal computer/workstation, and can send routing updates by means of electronic mail messages over the Internet or other computer network.

#### Brief Description of the Drawings

These and other features and advantages provided by the invention will be better and more completely understood by referring to the following detailed description of presently preferred embodiments in conjunction with the drawings, of which:

Figure 1 shows a telecommunications system including a device for routing information updates;

Figure 2 is a flowchart of example steps performed by the device for routing information updates; and

20       Figure 3 is a flowchart of example steps performed by an intelligent network node.

#### Detailed Description of Presently Preferred Example Embodiments

Figure 1 shows an example overall telecommunications system 50. System 50 may include an Intelligent Network architecture having at least one Intelligent  
25   Network node 52. Node 52 may be part of a larger Intelligent Network architecture. Node 52 stores a routing table 54. Routing table 54 may be used as part of the Universal Personal Telephone (UPT) service to route incoming telephone calls, facsimile transmissions and/or electronic mail messages to particular terminals such



as stationary or mobile telephones, fax machines, computers or other terminal devices.

System 50 also includes a device 60 for routing information updates to node 52. In the preferred embodiment, device 60 routes location updates informing node 52 of users' locations. For example, device 60 informs network node 52 when a particular user has arrived at a particular location, and when a particular user has departed from a particular location. Node 52 treats such location updates as UPT call registration or de-registration requests. More specifically, node 52 changes the information in routing table to reflect current user location as indicated by the location updates.

Device 60 includes or is connected to a sensing means for sensing user location. The sensing means can comprise any number of different arrangements or a combination of different arrangements.

In one example, the sensing means can comprise an electronic security locking system 62 or other electronic lock. In this example, the user must slip a card 64 into a card reader 66 to open a door 68 and enter or exit a room or building. When the user slips card 64 into the card reader 66 to enter, the security system 62 senses this and sends a message to the device 60 identifying the card holder. Device 60 sends a corresponding message to node 52 indicating that the identified user is on the premises and can receive telephone calls and other communications there. If the user needs to slip card 64 into the card reader 66 to exit, the security system 62 senses this and sends another message to device 60. Device 60 can send a corresponding message to node 52 indicating that the particular user is no longer on the premises and therefore cannot receive telephone calls or other communications there.

In another example, device 60 can be connected to a conventional mobile telephone receiver 70 of the type that receives mobile telephone location update messages. Such messages are sent periodically by standard mobile telephones 72 whenever they are turned on and operating, to allow cellular communications networks to keep track of which cell the mobile telephones are operating in. Device 60 can respond to such location update messages by automatically generating and sending location update messages to node 52. Node 52 may use such location update messages to register the mobile telephone as the device to which incoming calls for

the phone's owner should be routed, and can route incoming calls to mobile phone 72.

In yet another example, device 60 can be connected to a mobile phone battery charger 76. Battery charging station 76 can alert device 60 whenever mobile phone 5 72' is placed into the battery charging station. Device 60 can send a location update/registration message to node 52 that de-registers mobile phone 72' as being the user's terminal, and registering the stationary telephone at the charging station 76's location (e.g., the user's home).

In still another example, device 60 can be connected to a conventional 10 personal computer/workstation 80 that runs a small application allowing the user to indicate his presence very simply (e.g., by a single keystroke on keyboard 82 and/or by a "click" of mouse 84). Device 60 can, upon receiving a user presence indicating message from personal computer/workstation 80, send a location update message to node 52 effectively registering the personal computer/workstation (and/or telephones 15 or other telecommunications equipment co-located with the personal computer/workstation) as being the user's destination network address. This registration can expire a certain amount of time after initial registration, or it can stay effective until the user registers from another location.

In yet another example, device 60 can be connected to a conventional 20 telephone set 90 having a special key 92. When the user depresses key 92, device 60 can send a location update message to node 52 registering telephone set 90 as the user's incoming telephone call destination. When the user depresses key 92 again (or depresses a different, "de-registration" key), device 60 can send a further location update message that de-registers telephone set 90 for the user.

25 In yet another example, device 60 can be connected to a security system 100 of the type shops use to prevent theft. In this example, every user carries a badge, card or other object having a personalized transducer that electronically indicates user identity. Security system 100 detects when the user walks into the room or building, and also detects when the user walks out of the room or building. Security system 30 100 sends responsive messages to device 60, which in turn sends location update information to node 52 for purposes of registering or deregistering particular terminal

devices at the location with respect to particular users who have walked through the security system 100.

The location update information generated by device 60 may include the following information for example:

- 5 user identity information (e.g., user's UPT number or another identification from which the network node 52 can derive the user's UPT number);
- registration/deregistration indicator (i.e., whether the user is arriving or leaving the location); and
- an optional registration time duration (e.g., in the case of sensing devices that  
10 sense only arrival and not departure, the registration can be set for a certain number of hours such as the length of a work day for registering a place of work).

Device 60 can be connected to node 52 through any number of different communications paths. In one example, device 60 is connected through a standard telecommunications link such as DTMF (POTS) signaling, user-to-user information  
15 (ISDN) signaling, or USSD (GSM) signaling. In another example, device 60 can be connected to node 52 through a computer 102. Computer 102 can route messages from device 60 to node 52 through electronic mail or other messages over a computer network such as the Internet 104.

Figure 2 shows example steps performed by device 60. In this example,  
20 device 60 senses the user's arrival at a certain location (Figure 2, decision block 150). If the user has not yet arrived, device 60 keeps on checking periodically. Device 60 senses when the user arrives and is on site ("yes" exit to decision block 150), and sends a location update message to node 52 that registers the telecommunications devices at the location (Figure 2, block 152). Device 60 may then, if desired, sense  
25 user departure from the location (Figure 2, decision block 154). If the user has not yet departed, device 60 waits and keeps on checking. Device 60 senses when the user departs from the location (Figure 2, "yes" exit to decision block 154), and sends a corresponding location update to node 52 that de-registers the telecommunications devices at the location.

30 Figure 3 shows an example process performed by node 52. In this example, node 52 determines whether it has received a location update from device 60 (Figure 3, decision block 200). If it has ("yes" exit to decision block 200), node 52 retrieves

the network addresses of the telecommunications devices of the corresponding location from a database (block 202), and writes those network addresses into routing table 54 (Figure 3, block 204). If node receives an incoming call for the user ("yes" exit to decision block 206), node 52 routes the call to the user location based on the  
5 routing information contained within routing table (Figure 3, block 208).

The present invention thus allows a telecommunications network to automatically register and de-register terminal equipment based on sensed user location. The UPT user does not need to remember to manually register upon arriving at a location or de-register upon leaving a location. Instead, automatic  
10 sensing devices sense when the UPT user arrive and/or leave a location, and a device for routing information updates automatically generates and sends UPT registration and/or de-registration messages to an intelligent network node in response to sensed user location.

While the invention has been described in connection with various preferred  
15 embodiments, the embodiments have been presented by way of example only, and not limitation. The breadth and scope of the present invention should not be limited by any of the described example embodiments, but to the contrary, should be defined only in accordance with the following claims and their equivalents.

What is claimed is:

1. A telecommunications system having an intelligent network architecture, the system comprising:

5 an intelligent network including at least one intelligent network node, the intelligent network node storing at least one intelligent network universal personal telephone service routing table and routing calls to users at least in part in response to the routing table contents;

at least one means for sensing user location without requiring the user to carry  
10 portable telephone equipment; and

a device for routing information updates coupled to the sensing means and to the intelligent network node, the device for routing information updates generating intelligent network universal personal telephone service location update messages in response to the sensing means and sending the intelligent network universal personal  
15 telephone service location update messages to the intelligent network node, the intelligent network node updating its intelligent network universal personal telephone service routing table at least in part in response to the location update messages.

2. A telecommunications system as in claim 1 wherein the sensing means comprises a personal computer including a keyboard and a mouse, the personal  
20 computer running a small application that allows the user to indicate his presence by a single keystroke on the keyboard and/or clicking the mouse.

3. A telecommunications system as in claim 1 wherein the location update message includes a user UPT number, a registration/deregistration indicator, and an optional registration time duration.

25 4. A telecommunications system comprising:  
an intelligent network including at least one intelligent network node, the intelligent network node storing at least one routing table and routing calls to users at least in part in response to the routing table contents;

at least one means for sensing user location; and  
30 a device for routing information updates coupled to the sensing means and to the intelligent network node, the device for routing information updates generating location update messages in response to the sensing means and sending the location

update messages to the intelligent network node, the intelligent network node updating its routing table at least in part in response to the location update messages.

5           5. A telecommunications system as in claim 4 wherein the sensing means comprises an electronic lock.

6. A telecommunications system as in claim 4 wherein the sensing means comprises a mobile phone receiver responsive to location updates generated by a mobile phone.

10

7. A telecommunications system as in claim 4 wherein the sensing means comprises a mobile phone battery charging station that senses when a mobile phone is coupled thereto.

15

8. A telecommunications system as in claim 4 wherein the sensing means comprises a computer that senses user manipulation thereof.

9. A telecommunications system as in claim 4 wherein the sensing means comprises a telephone set including a special key, the special key, in use, being  
20 depressed by the user to indicate user presence at the location of the telephone set.

10. A telecommunications system as in claim 4 wherein the sensing means comprises a security system that automatically senses user passage through a security zone.

25

11. A telecommunications system as in claim 4 further including means for coupling the routing device to the intelligent network node.

12. A telecommunications system as in claim 11 wherein the coupling means  
30 comprises a standard DTMF telephone signaling line.

13. A telecommunications system as in claim 11 wherein the coupling means comprises an ISDN signaling link.

14. A telecommunications system as in claim 11 wherein the coupling means  
5 comprises a GSM signaling link.

15. A telecommunications system as in claim 11 wherein the coupling means comprises means for sending a message over the Internet.

10 16. A method of registering a terminal to a user comprising:  
(a) automatically sensing user presence at a location having at least one terminal;  
(b) generating a location update message in response to step (a); and  
(c) in response to the location update message generated by step (b),  
15 registering the terminal to the user sensed by step (a).

17. A method as in claim 16 wherein sensing step (a) comprises sensing user operation of an electronic lock.

20 18. A method as in claim 16 wherein sensing step (a) comprises sensing receipt of at least one mobile phone location update message.

19. A method as in claim 16 wherein sensing step (a) comprises sensing coupling of a mobile phone to a battery charger.

25 20. A method as in claim 16 wherein sensing step (a) comprises sensing user operation of a computer device.

21. A method as in claim 16 wherein sensing step (a) comprises sensing user  
30 depression of a special button mounted on a telephone set.

22. A method as in claim 16 wherein sensing step (a) comprises sensing user passage through a security system.

23. A method as in claim 16 further including transmitting the location update  
5 message to an intelligent network node over the Internet.

24. A method as in claim 16 further including transmitting the location update message to an intelligent network node over a conventional telecommunications link.


10 25. In a telecommunications network of the type including a Universal Personal Telecommunications service that enables the network to route incoming communications directed to a particular user to any of a multiplicity of terminal devices, a method of automatically de-registering a terminal device comprising:

- 15 (a) automatically sensing user departure from the terminal device location;  
(b) generating a location update message in response to step (a); and  
(c) in response to the location update message generated by step (b),  
deregistering the terminal with respect to the user sensed by step (a).

20 26. A method as in claim 25 wherein the sensing step senses the identity of the user, and the generating step generates a location update message that encodes sensed user identity.



1/3

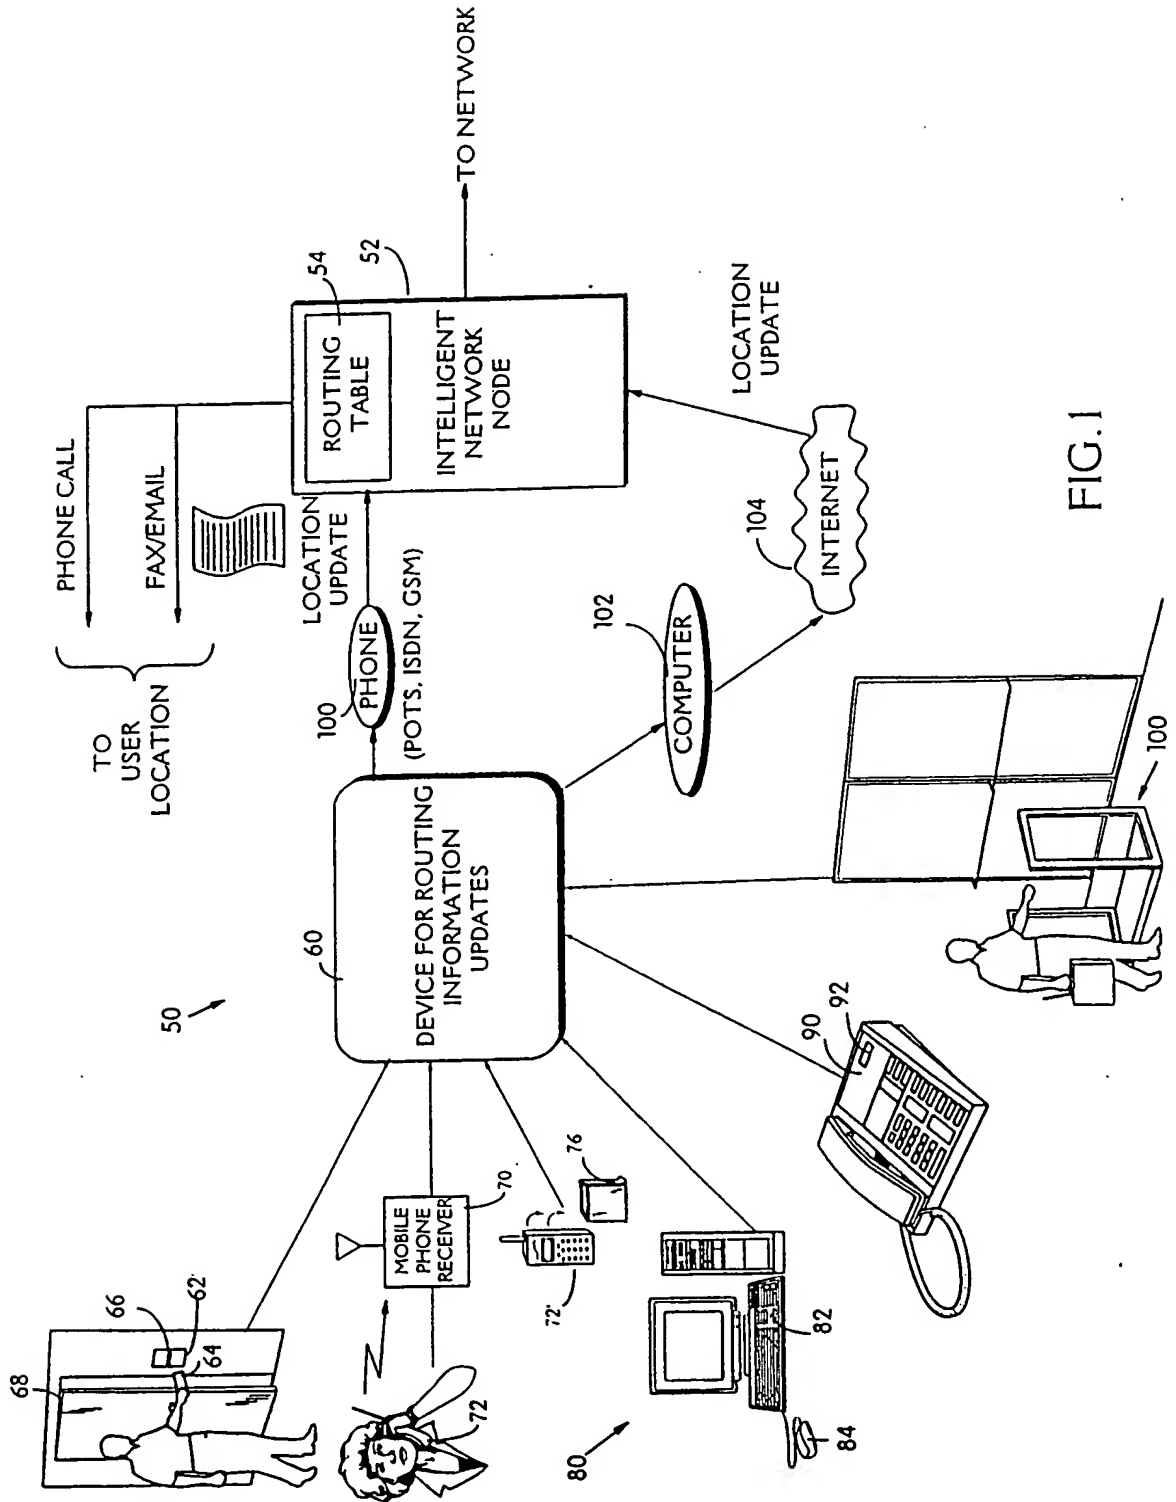

2/3

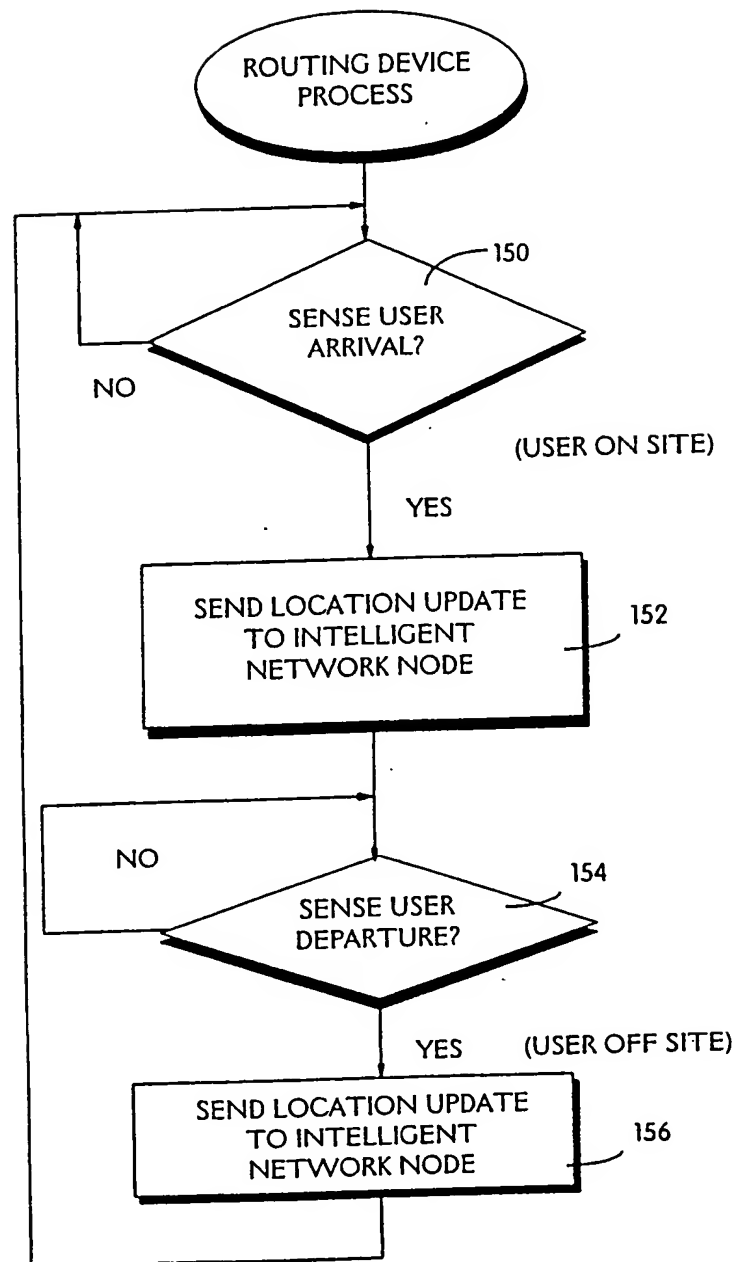


FIG.2

3/3

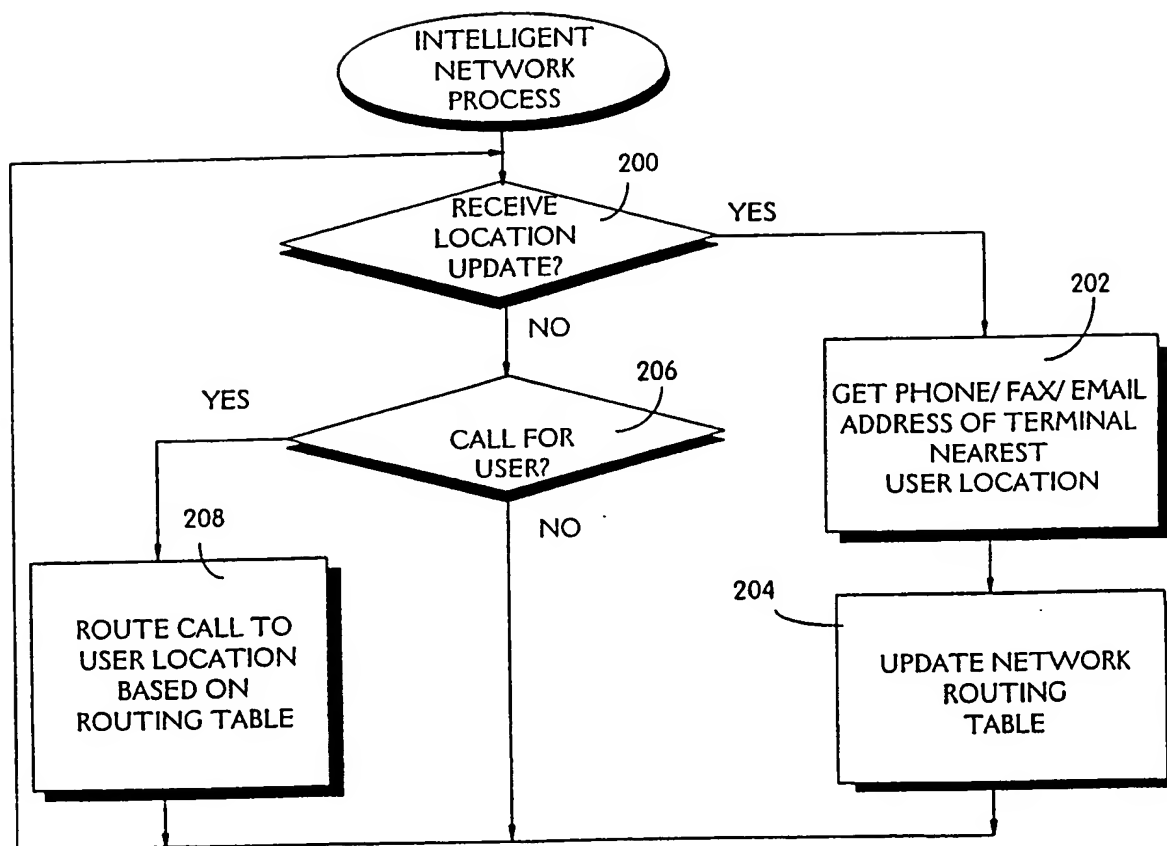


FIG.3

## INTERNATIONAL SEARCH REPORT

International Application No

PCT/SE 97/01896

A. CLASSIFICATION OF SUBJECT MATTER  
IPC 6 H0407/38 H04M3/42

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 H040 H04M

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	DE 44 20 462 A (SEL ALCATEL AG) 14 December 1995  see the whole document ---	1-6, 8-18, 20-24
X	EP 0 448 076 A (FUJITSU LIMITED) 25 September 1991  see column 10, line 54 - column 11, line 39 see column 6, line 23 - column 9, line 5 ---	1-4, 8-13, 16, 20-22, 24, 25
X	EP 0 484 067 A (AMERICAN TELEPHONE & TELEGRAPH) 6 May 1992  see the whole document ---	1, 4, 5, 8, 11, 16, 17, 20, 25, 26
-/--		

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

\* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance  
"E" earlier document but published on or after the international filing date  
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)  
"O" document referring to an oral disclosure, use, exhibition or other means  
"P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention  
"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone  
"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.  
"&" document member of the same patent family

Date of the actual completion of the international search

16 April 1998

Date of mailing of the international search report

23/04/1998

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Janyszek, J-M

## INTERNATIONAL SEARCH REPORT

Int. l. Application No

PCT/SE 97/01896

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	<p>EP 0 433 465 A (NIPPON TELEGRAPH &amp; TELEPHONE) 26 June 1991</p> <p>see page 9, line 11 - page 10, line 6 see page 11, line 1 - line 28; claims 1,6-11; figures</p> <p>---</p>	<p>4,6, 11-16, 18,23,24</p>
X	<p>US 5 506 887 A (EMERY MARK J ET AL) 9 April 1996</p> <p>see column 7, line 61 - column 9, line 19 see column 15, line 63 - column 16, line 11 see column 16, line 49 - column 17, line 39; figures</p> <p>---</p>	<p>4,6,9, 11-16, 18,21, 23,24</p>
X	<p>WO 95 01070 A (ERICSSON TELEFON AB L M) 5 January 1995</p> <p>see page 17, line 26 - page 19, line 33</p> <p>---</p>	<p>4,6,7, 11-14, 16,18, 19,23-26</p>
X	<p>EP 0 520 194 A (NETWORK ACCESS CORP) 30 December 1992</p> <p>see column 5, line 24 - column 12, line 28 see column 13, line 26 - line 45</p> <p>---</p>	<p>4,11-16, 23-26</p>
X	<p>EP 0 578 374 A (NORTHERN TELECOM LTD) 12 January 1994</p> <p>see page 3, line 42 - line 55 see page 4, line 18 - line 28 see page 4, line 40 - line 58 see page 5, line 39 - page 6, line 32 see page 8, line 38 - page 9, line 24; figures</p> <p>---</p>	<p>4,5, 10-13, 15-17, 22-24</p>
P,X	<p>US 5 592 533 A (FARRIS ROBERT D ET AL) 7 January 1997</p> <p>see column 11, line 55 - column 12, line 37 see column 15, line 50 - column 19, line 67</p> <p>-----</p>	<p>1-26</p>

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/SE 97/01896

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
DE 4420462 A	14-12-95	AU 2791695 A	05-01-96
		CA 2169379 A	21-12-95
		WO 9534985 A	21-12-95
		EP 0713626 A	29-05-96
		JP 9502072 T	25-02-97
EP 0448076 A	25-09-91	JP 3270453 A	02-12-91
		CA 2038476 C	07-02-95
		DE 69126806 D	21-08-97
		US 5414759 A	09-05-95
EP 0484067 A	06-05-92	US 5243645 A	07-09-93
		CA 2050691 A,C	02-05-92
		JP 4267664 A	24-09-92
EP 0433465 A	26-06-91	DE 69027412 D	18-07-96
		DE 69027412 T	30-01-97
		WO 9100664 A	10-01-91
		US 5251248 A	05-10-93
US 5506887 A	09-04-96	US 5469496 A	21-11-95
		US 5353331 A	04-10-94
		US 5579379 A	26-11-96
		US 5664005 A	02-09-97
		US 5610972 A	11-03-97
		WO 9318606 A	16-09-93
WO 9501070 A	05-01-95	AU 7089294 A	17-01-95
		CA 2163745 A	05-01-95
		CN 1126017 A	03-07-96
		EP 0705522 A	10-04-96
		FI 956144 A	20-12-95
		JP 8511925 T	10-12-96
		NO 955209 A	21-02-96
		SE 9302161 A	23-12-94
EP 0520194 A	30-12-92	US 5315636 A	24-05-94
		CA 2069727 A	29-12-92
		JP 5191516 A	30-07-93
		US 5416780 A	16-05-95

# INTERNATIONAL SEARCH REPORT

information on patent family members

International Application No

PCT/SE 97/01896

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0578374 A	12-01-94	US 5363425 A	08-11-94
		CA 2091393 A	30-12-93
		JP 6090481 A	29-03-94
<hr/>			
US 5592533 A	07-01-97	US 5610969 A	11-03-97
<hr/>			